

## AMY-35-S

~18° spot beam

### SPECIFICATION:

Dimensions	Ø 35.0 mm
Height	8.5 mm
Fastening	socket
ROHS compliant	yes ⓘ



### MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
AMY-35-S	Single lens	PMMA	clear		
AMY-35-HLD2-B	Holder B	PC	black		
AMY-35-HLD2-B-WHT	Holder B	PC	white		



## ORDERING INFORMATION:

<b>Component</b>	<b>Qty in box</b>	<b>MOQ</b>	<b>MPQ</b>	<b>Box weight (kg)</b>
C17794_AMY-35-S	1650	132	66	9.7
<b>Assembly</b>				
CP19167_AMY-35-S-B2-WHT	1320	132	66	9.6
CP19161_AMY-35-S-B2	1320	132	66	9.6

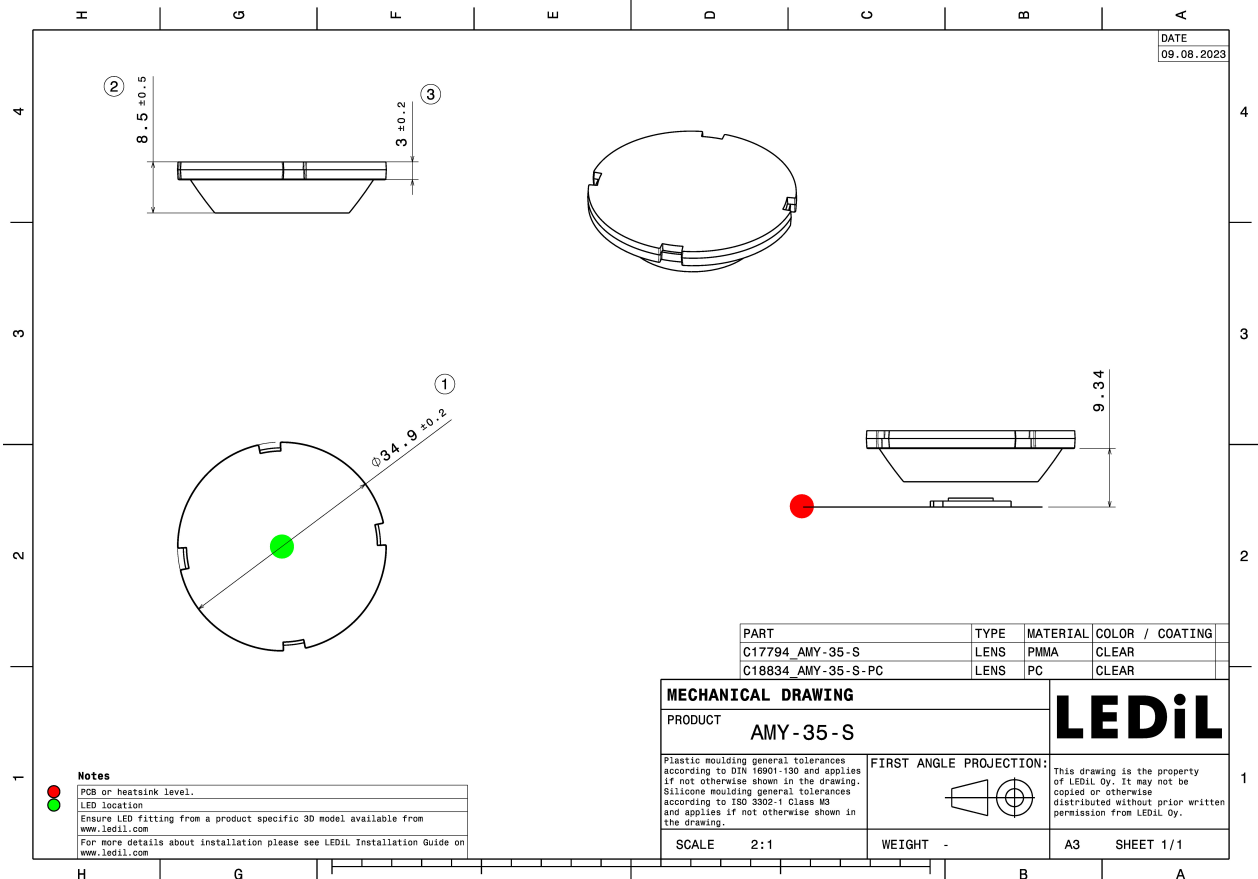
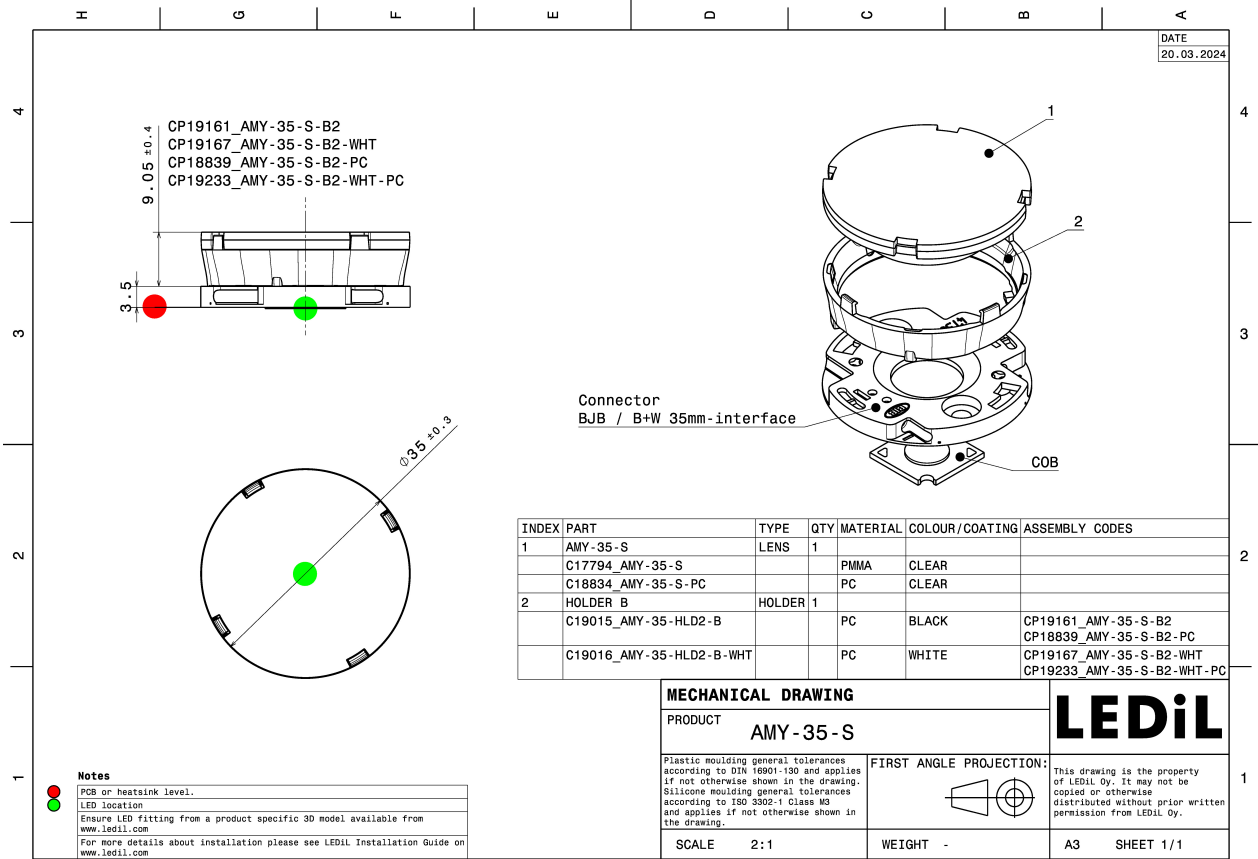


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

### OPTICAL RESULTS (MEASURED):

bridgelux



LED Vesta TW 6mm DP  
 Ordering code CP19161\_AMY-35-S-B2  
 FWHM / FWTM 22.0° / 47.0°  
 Efficiency 88 %  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 Bender Wirth: 504 Typ B35L

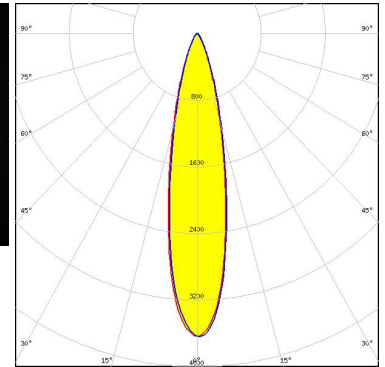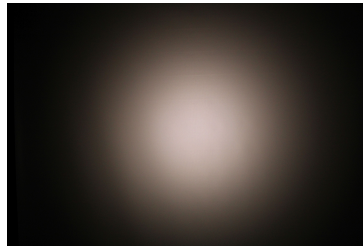

Light distribution files

### CITIZEN



LED CLU700/701/702/703  
 Ordering code C17794\_AMY-35-S  
 FWHM / FWTM 19.0° / 41.0°  
 Efficiency 89 %  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

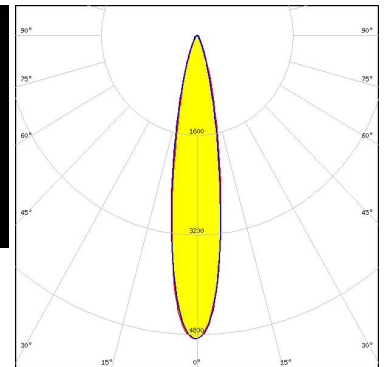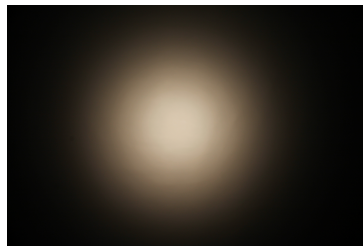

Light distribution files

### CITIZEN

LED CLU700/701/702/703  
 Ordering code CP19161\_AMY-35-S-B2  
 FWHM / FWTM 19.0° / 41.0°  
 Efficiency 89 %  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 BJB: 47.360.1020

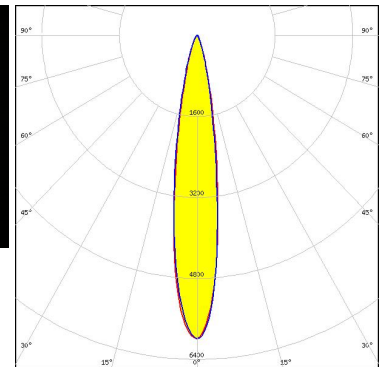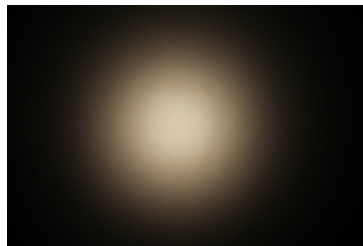


Light distribution files

### OPTICAL RESULTS (MEASURED):

#### CITIZEN



LED CLU700/701/702/703  
 Ordering code CP19161\_AMY-35-S-B2  
 FWHM / FWTM 17.0° / 36.0°  
 Efficiency 90 %  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 Bender Wirth: 634a Bayonet35L

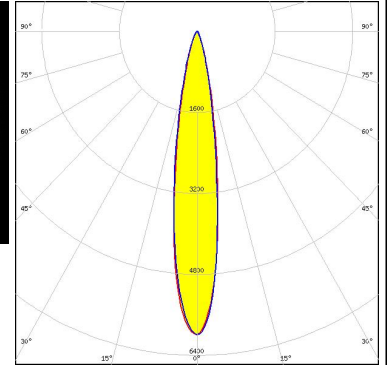

Light distribution files

#### CITIZEN


LED CLU7L3  
 Ordering code CP19161\_AMY-35-S-B2  
 FWHM / FWTM 12.0° / 25.0°  
 Efficiency 92 %  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 Bender Wirth: 667a Bayonet35

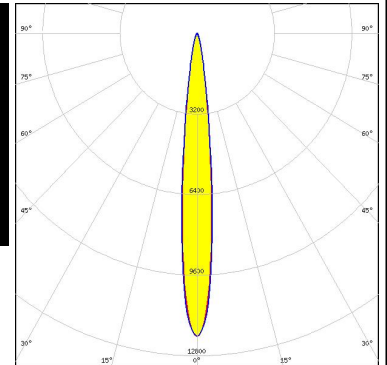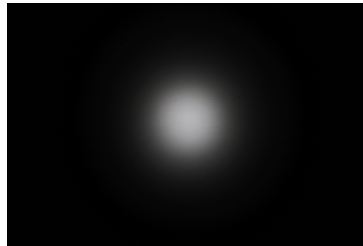

Light distribution files

#### CITIZEN

LED CLU7L3  
 Ordering code CP19161\_AMY-35-S-B2  
 FWHM / FWTM 11.0° / 26.0°  
 Efficiency 91 %  
 Peak intensity 11.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C19425\_SOCKET-B-35-N

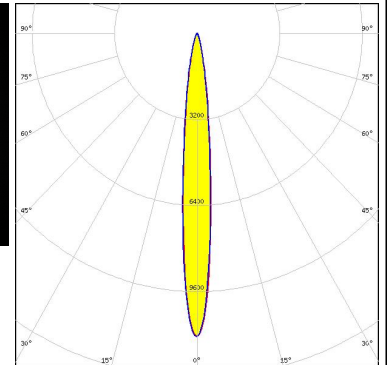


Light distribution files

### OPTICAL RESULTS (MEASURED):

#### CITIZEN


LED CLU7R3  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 16.0° / 35.0°  
Efficiency 91 %  
Peak intensity 6.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C19424\_SOCKET-B-35-M

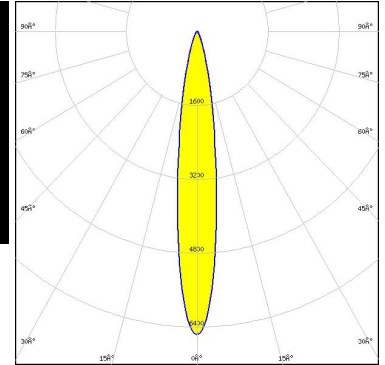

Light distribution files

#### CITIZEN


LED CLU7S3  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 13.0° / 31.0°  
Efficiency 91 %  
LEDs/each optic 1  
Light colour/type White  
Required components:  
Bender Wirth: 667a Bayonet35

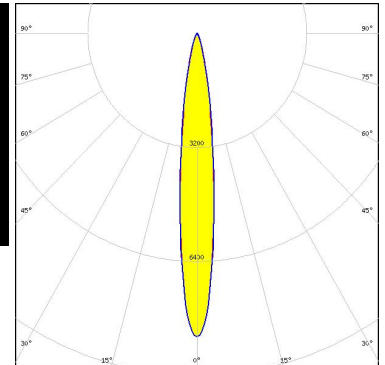

Light distribution files

#### CITIZEN

LED CLU7S3  
Ordering code CP17970\_AMY-35-S-B  
FWHM / FWTM 14.0° / 33.0°  
Efficiency 91 %  
Peak intensity 7.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C19425\_SOCKET-B-35-N


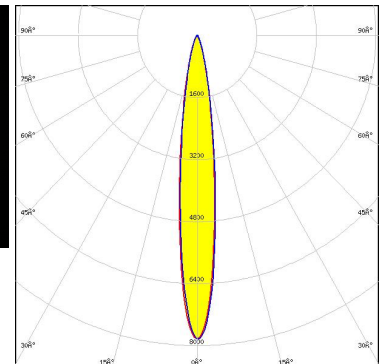


Light distribution files

### OPTICAL RESULTS (MEASURED):




**LED** CMU10xx  
**Ordering code** CP19161\_AMY-35-S-B2  
**FWHM / FWTM** 29.0° / 58.0°  
**Efficiency** 88 %  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**  
 BJB: 47.360.1020

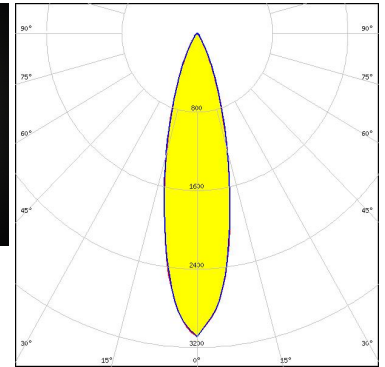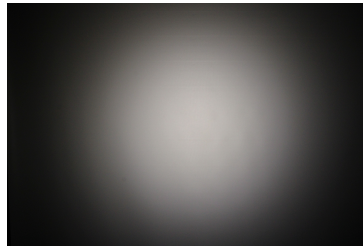

Light distribution files





**LED** LUXEON 7070  
**Ordering code** CP19161\_AMY-35-S-B2  
**FWHM / FWTM** 19.0° / 42.0°  
**Efficiency** 90 %  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**  
 Bender Wirth: 634a Bayonet35L

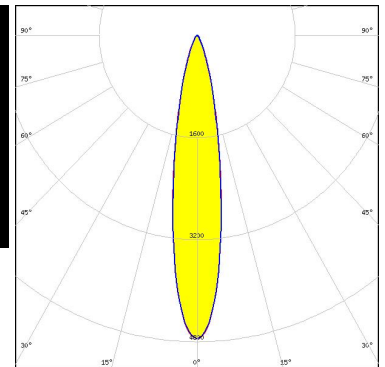

Light distribution files



**LED** CTM-9 (Tunable White)  
**Ordering code** CP19161\_AMY-35-S-B2  
**FWHM / FWTM** 30.0° / 59.0°  
**Efficiency** 85 %  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**  
 Bender Wirth: 495 Typ B35L

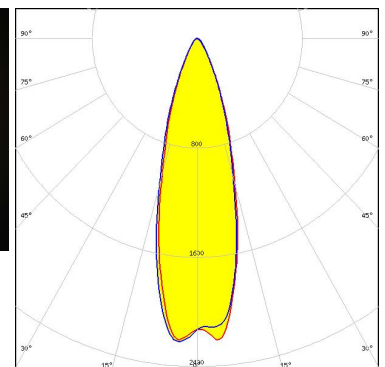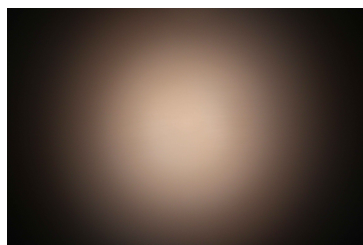


Light distribution files

### OPTICAL RESULTS (SIMULATED):



LED V10 Gen 8-9  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 26.0° / 53.0°  
Efficiency 88 %  
Peak intensity 3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

BJB: 47.360.1020

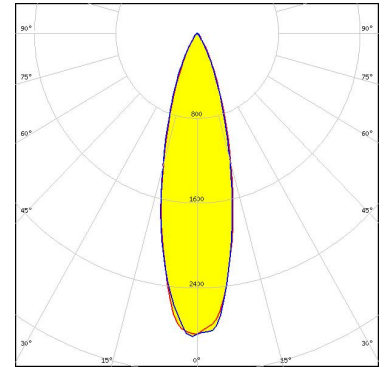


Light distribution files



LED V10 Gen 8-9  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 28.0° / 56.0°  
Efficiency 90 %  
Peak intensity 2.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Bender Wirth: 634b Bayonet35L

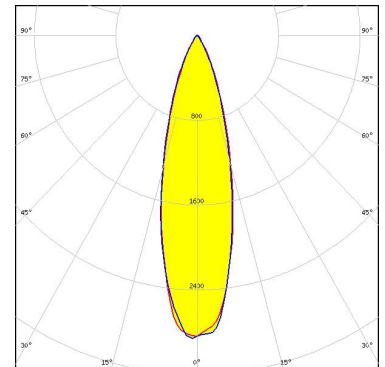


Light distribution files



LED V3 HD Gen 8 FC  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 18.0° / 37.0°  
Efficiency 94 %  
Peak intensity 7.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Bender Wirth: 634c Bayonet35L

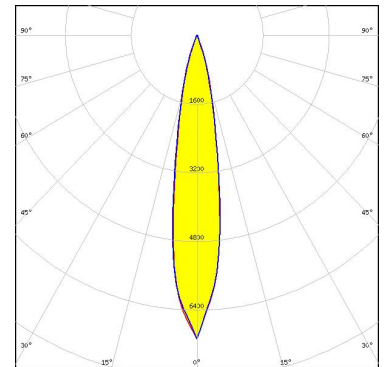


Light distribution files



### OPTICAL RESULTS (SIMULATED):



LED V6 HD Gen 8  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 16.0° / 32.0°  
Efficiency 95 %  
Peak intensity 9.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

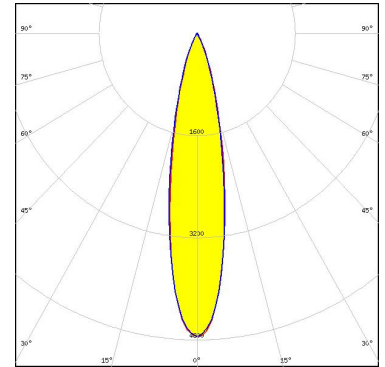


Bender Wirth: 634c Bayonet35L

Light distribution files



LED V6 HD Gen 8  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 22.0° / 45.0°  
Efficiency 92 %  
Peak intensity 4.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

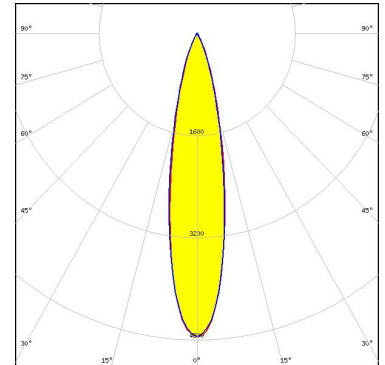


Bender Wirth: 634c Bayonet35L

Light distribution files



LED Vesta DTW 6mm  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 22.0° / 44.0°  
Efficiency 92 %  
Peak intensity 4.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

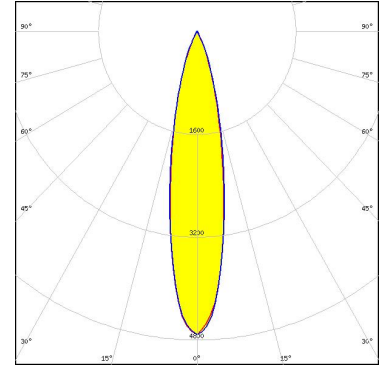


Bender Wirth: 652b Bayonet35L

Light distribution files

### OPTICAL RESULTS (SIMULATED):



LED Vesta DTW 9mm (4W/6W/12W)  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 27.0° / 51.0°  
Efficiency 90 %  
Peak intensity 3.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

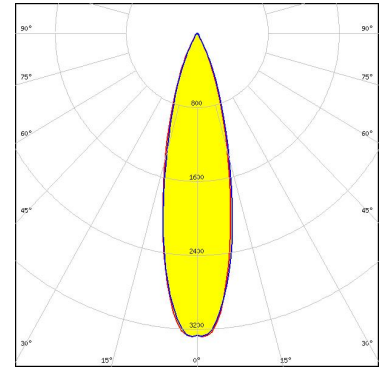


Bender Wirth: 652b Bayonet35L

Light distribution files

### CITIZEN

LED CLL02x/CLU02x (LES10)  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 27.0° / 55.0°  
Efficiency 88 %  
Peak intensity 2.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

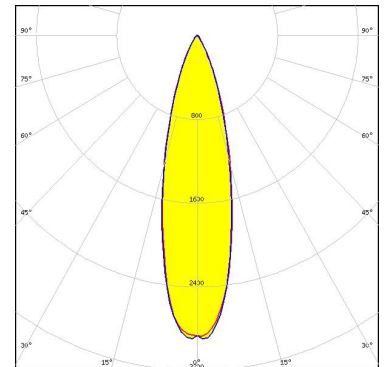


BJB: 47.360.1020

Light distribution files

### CITIZEN

LED CLU700/701/702/703  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 18.0° / 38.0°  
Efficiency 90 %  
Peak intensity 6.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

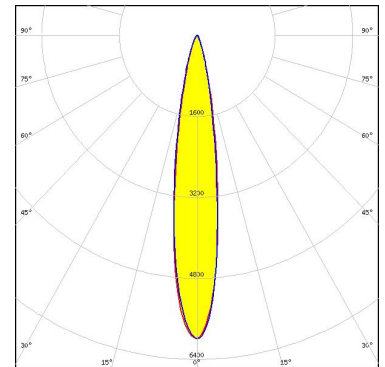


BJB: 47.360.1020

Light distribution files

### OPTICAL RESULTS (SIMULATED):

#### CITIZEN

LED CLU700/701/702/703  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 18.0° / 40.0°  
Efficiency 89 %  
Peak intensity 5.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

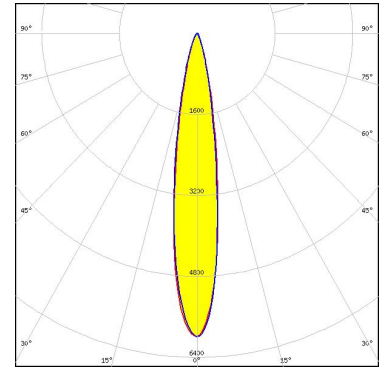


BJB: 47.360.1020

Light distribution files

#### CITIZEN

LED CLU7A2/7A3  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 14.0° / 32.0°  
Efficiency 92 %  
Peak intensity 8.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

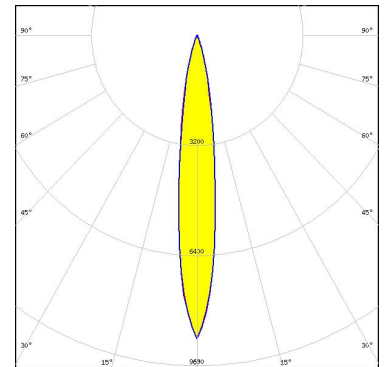


BJB: 47.360.1020

Light distribution files

#### CITIZEN

LED CLU7B2  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 14.0° / 30.0°  
Efficiency 92 %  
Peak intensity 10 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

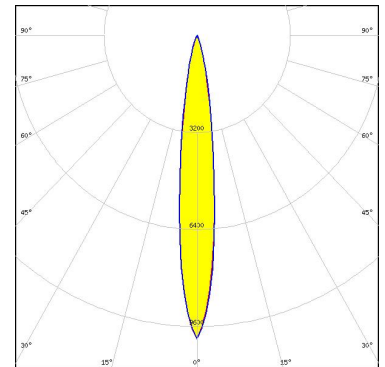


BJB: 47.360.1020

Light distribution files

### OPTICAL RESULTS (SIMULATED):

#### CITIZEN


LED CLU7L3  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 14.0° / 30.0°  
Efficiency 89 %  
Peak intensity 9.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C19425\_SOCKET-B-35-N

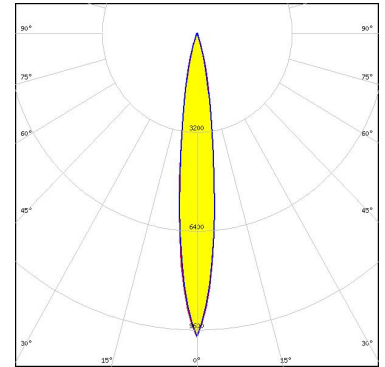

Light distribution files

#### CITIZEN


LED CLU7S3  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 16.0° / 34.0°  
Efficiency 88 %  
Peak intensity 8.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C19425\_SOCKET-B-35-N

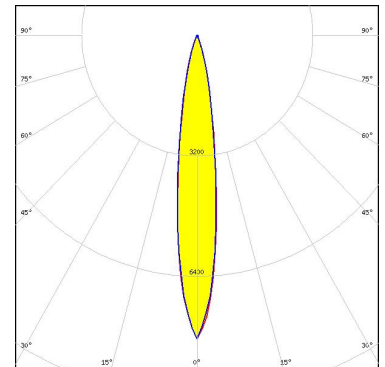

Light distribution files



LED CMA1306  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 19.0° / 41.0°  
Efficiency 91 %  
Peak intensity 5.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

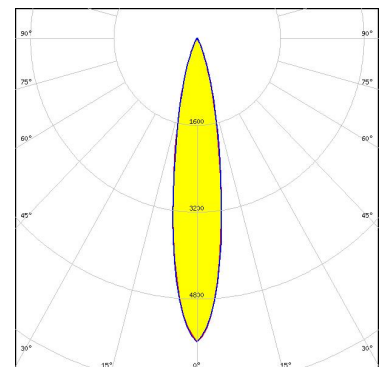


Light distribution files

Bender Wirth: 634c Bayonet35L

### OPTICAL RESULTS (SIMULATED):



LED CMU10xx  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 26.0° / 53.0°  
Efficiency 87 %  
Peak intensity 3.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

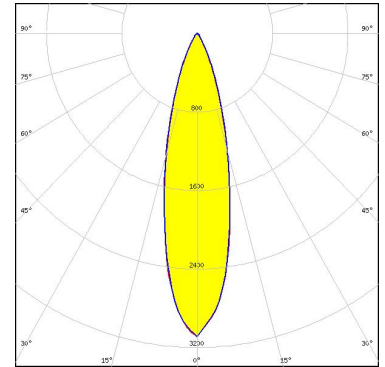


BJB: 47.360.1020

Light distribution files



LED CXA/B 15xx  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 26.0° / 52.0°  
Efficiency 87 %  
Peak intensity 3.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

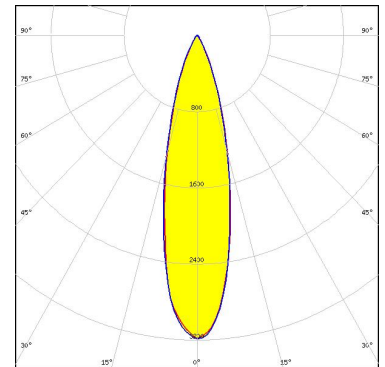


BJB: 47.360.1030

Light distribution files



LED CXA/B 15xx  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 24.0° / 50.0°  
Efficiency 88 %  
Peak intensity 3.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

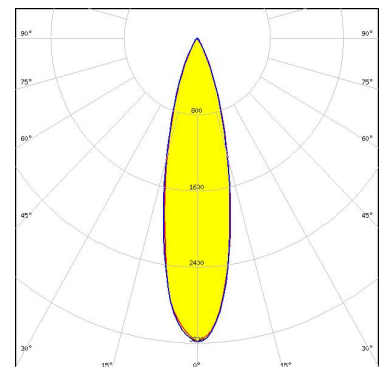


BJB: 47.360.1030

Light distribution files

### OPTICAL RESULTS (SIMULATED):




LED LUXEON 7070  
FWHM / FWTM 17.0° / 38.0°  
Efficiency 94 %  
Peak intensity 6.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

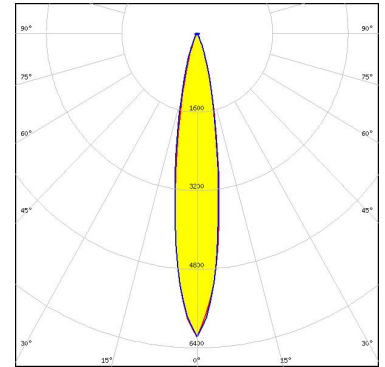

Light distribution files



LED LUXEON CoB 1202/1203  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 26.0° / 53.0°  
Efficiency 90 %  
Peak intensity 3.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

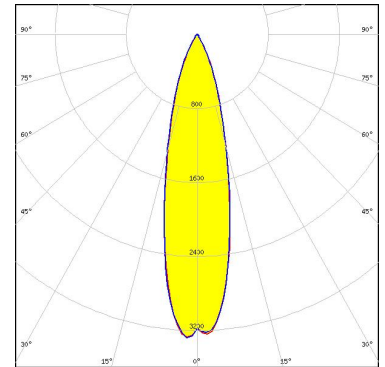


BJB: 47.360.1110

Light distribution files



LED LUXEON CoB 1202HD  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 21.0° / 44.0°  
Efficiency 93 %  
Peak intensity 4.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

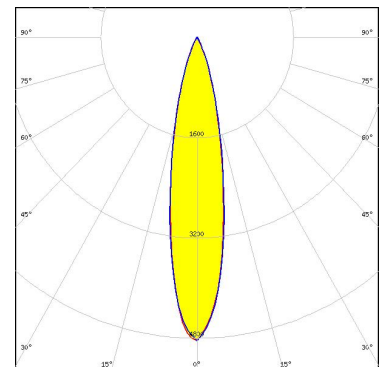


Bender Wirth: 652a Bayonet35L

Light distribution files

### OPTICAL RESULTS (SIMULATED):



LED LUXEON CX Plus CoB - HD S01H4  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 16.0° / 34.0°  
Efficiency 90 %  
Peak intensity 7.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

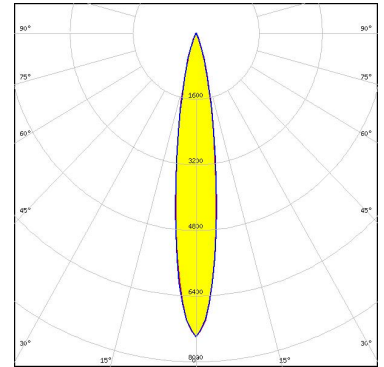


Bender Wirth: 634c Bayonet35L

Light distribution files



LED LUXEON CX Plus CoB - HD S02H6  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 20.0° / 43.0°  
Efficiency 92 %  
Peak intensity 5.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

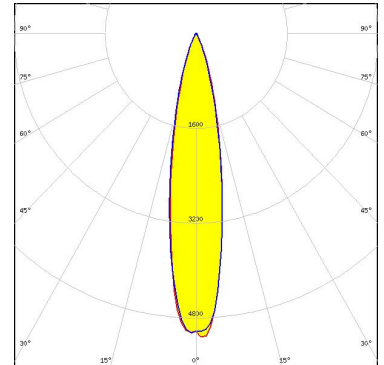


Bender Wirth: 634c Bayonet35L

Light distribution files



LED LUXEON CX Plus CoB - HD S04H9  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 28.0° / 54.0°  
Efficiency 90 %  
Peak intensity 3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

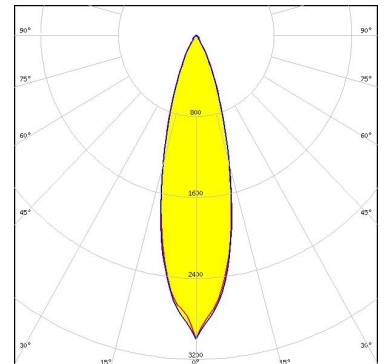

Bender Wirth: 634a Bayonet35L


Light distribution files

### OPTICAL RESULTS (SIMULATED):

**LUMILEDS**

LED: LUXEON CX Plus CoB S01 (Gen2)  
 Ordering code: CP19161\_AMY-35-S-B2  
 FWHM / FWTM: 18.0° / 39.0°  
 Efficiency: 92 %  
 Peak intensity: 6 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: White  
 Required components:

Bender Wirth: 634c Bayonet35L

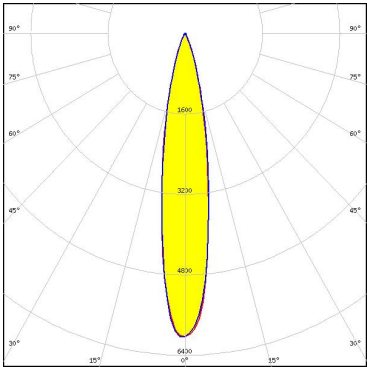


Light distribution files

**LUMINUS**

LED: CTM-6 (Tunable White) Gen2  
 Ordering code: CP19161\_AMY-35-S-B2  
 FWHM / FWTM: 26.0° / 51.0°  
 Efficiency: 91 %  
 Peak intensity: 3.4 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: Tunable White  
 Required components:

Bender Wirth: 495 Typ B35L

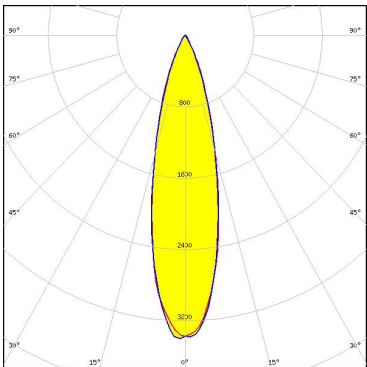


Light distribution files

**LUMINUS**

LED: CTM-9 (Tunable White) Gen2  
 Ordering code: CP19161\_AMY-35-S-B2  
 FWHM / FWTM: 32.0° / 62.0°  
 Efficiency: 88 %  
 Peak intensity: 2.2 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: Tunable White  
 Required components:

Bender Wirth: 495 Typ B35L

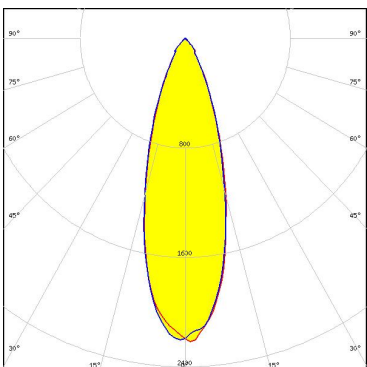


Light distribution files



### OPTICAL RESULTS (SIMULATED):



**LED** CXM-3  
**Ordering code** CP19161\_AMY-35-S-B2  
**FWHM / FWTM** 13.0° / 30.0°  
**Efficiency** 94 %  
**Peak intensity** 11 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

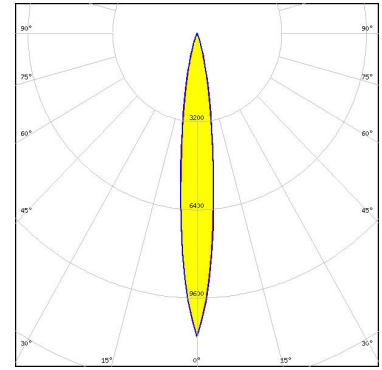


Bender Wirth: 634a Bayonet35L

Light distribution files



**LED** CXM-4  
**Ordering code** CP19161\_AMY-35-S-B2  
**FWHM / FWTM** 14.0° / 34.0°  
**Efficiency** 93 %  
**Peak intensity** 8.6 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

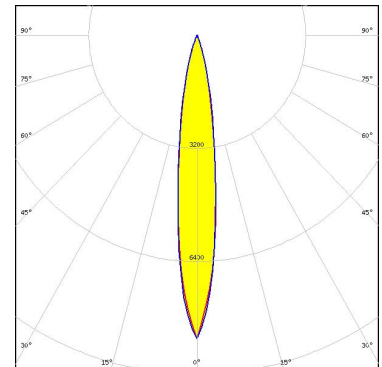


Bender Wirth: 634a Bayonet35L

Light distribution files



**LED** CxM-6 (13.5x13.5)  
**Ordering code** CP19161\_AMY-35-S-B2  
**FWHM / FWTM** 18.0° / 41.0°  
**Efficiency** 92 %  
**Peak intensity** 5.8 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

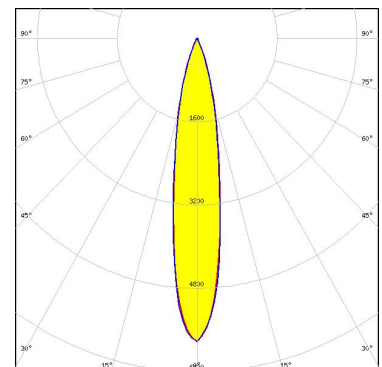


BJB: 47.360.1020

Light distribution files

### OPTICAL RESULTS (SIMULATED):



LED COB S-Type (LES 6)  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 18.0° / 40.0°  
Efficiency 92 %  
Peak intensity 5.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

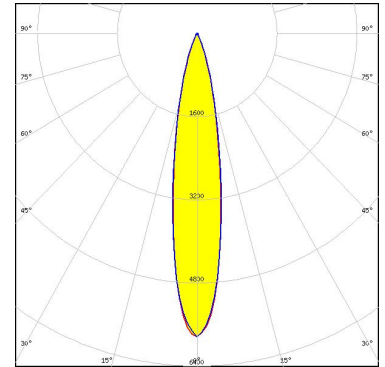


Bender Wirth: 652a Bayonet35L

Light distribution files



LED COB S-Type (LES 7)  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 20.0° / 42.0°  
Efficiency 92 %  
Peak intensity 5.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

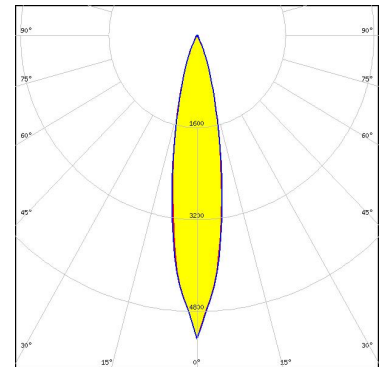


Bender Wirth: 652a Bayonet35L

Light distribution files



LED COB T-Type  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 19.0° / 41.0°  
Efficiency 92 %  
Peak intensity 5.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

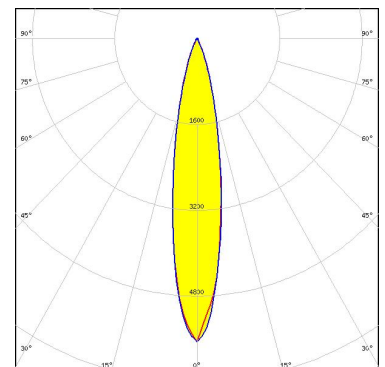


Bender Wirth: 652a Bayonet35L

Light distribution files

### OPTICAL RESULTS (SIMULATED):

#### SAMSUNG


LED LC003D / LC006D / LC009D / LC013D  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 26.0° / 54.0°  
Efficiency 82 %  
Peak intensity 2.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C18968\_SOCKET-B-35-C

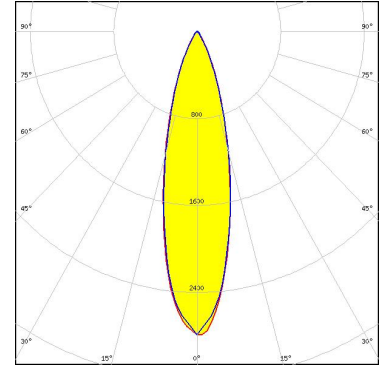

Light distribution files

#### SAMSUNG


LED LC003D / LC006D / LC009D / LC013D  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 26.0° / 53.0°  
Efficiency 90 %  
Peak intensity 3.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

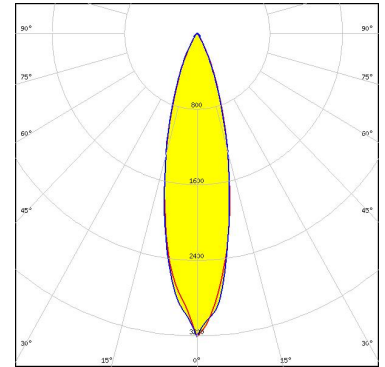

Light distribution files

#### SAMSUNG

LED LC010C G2  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 16.0° / 40.0°  
Efficiency 92 %  
Peak intensity 6.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

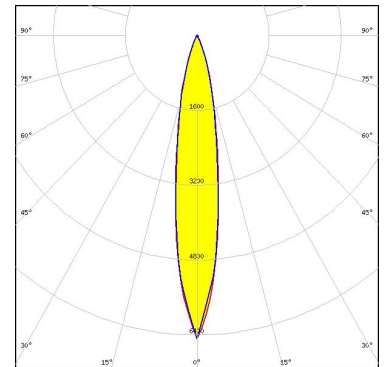


Light distribution files

### OPTICAL RESULTS (SIMULATED):

#### SAMSUNG

LED LH502D  
FWHM / FWTM 12.0° / 30.0°  
Efficiency 88 %  
Peak intensity 10.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

BJB: 47.360.1010

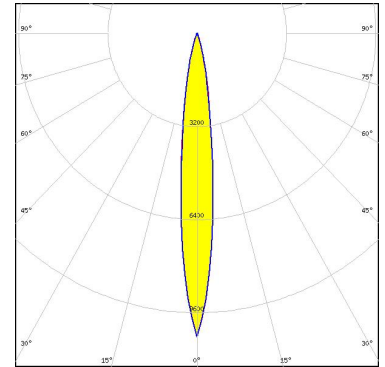


Light distribution files



LED MJT COB LES 6  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 17.0° / 39.0°  
Efficiency 92 %  
Peak intensity 6.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

BJB: 47.360.1020

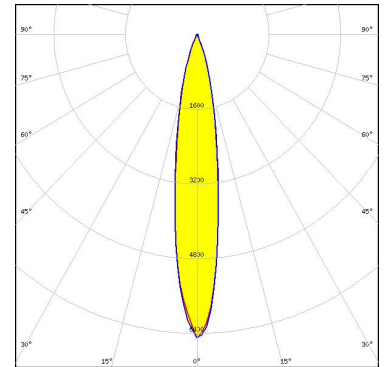


Light distribution files



LED MJT COB LES 9.8  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 28.0° / 54.0°  
Efficiency 90 %  
Peak intensity 3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

BJB: 47.360.1020

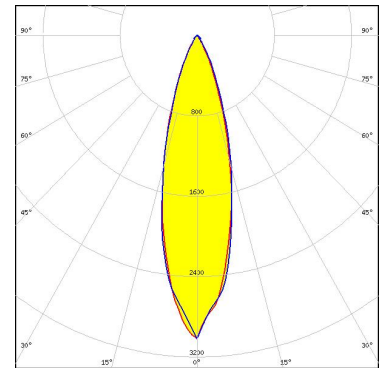


Light distribution files

### OPTICAL RESULTS (SIMULATED):

#### TRIDONIC


LED SLE 06mm 1600lm xxx R ADV8  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 18.0° / 40.0°  
Efficiency 89 %  
Peak intensity 5.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C18968\_SOCKET-B-35-C

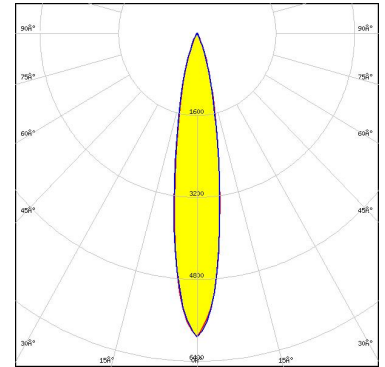

Light distribution files

#### TRIDONIC


LED SLE SNC8 LES06  
Ordering code CP19161\_AMY-35-S-B2  
FWHM / FWTM 18.0° / 40.0°  
Efficiency 92 %  
Peak intensity 6.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

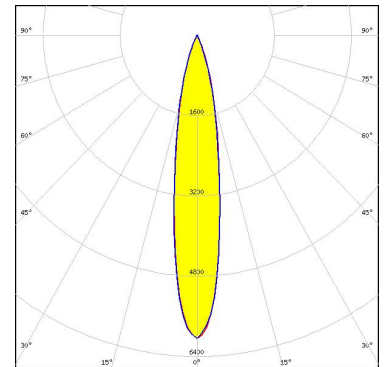

Light distribution files

#### XICATO

LED XOB 6 mm  
Ordering code C17794\_AMY-35-S  
FWHM / FWTM 17.0° / 36.0°  
Efficiency 94 %  
Peak intensity 6.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

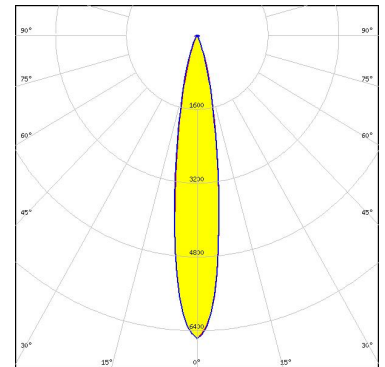


Light distribution files

### OPTICAL RESULTS (SIMULATED):

#### XICATO

LED	XOB 9.8 mm
Ordering code	C17794_AMY-35-S
FWHM / FWTM	24.0° / 51.0°
Efficiency	92 %
Peak intensity	3.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

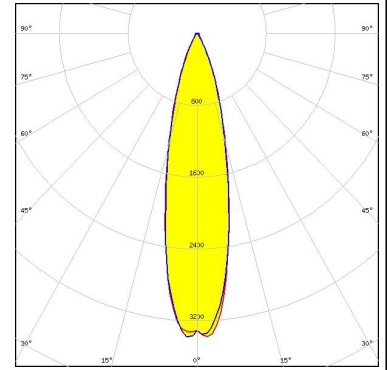

Light distribution files

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)